


## HIGH CAPACITY 1600 TUBE CONVEYOR

The Convey-All 1600 series conveyor is a dependable, long-lasting grain and fertiliser conveyor built with over 30 years of innovation experience and supported by industry leading warranty and support.

This 1600 series of high capacity tube conveyors are equipped with a 10" tube and a 16" belt which allows increased capacity (up to 200 tonnes per hour) and a fuller tube.


This Conveyor will move product fast and efficiently and is available in a multitude of lengths to match your on farm or in field requirements.

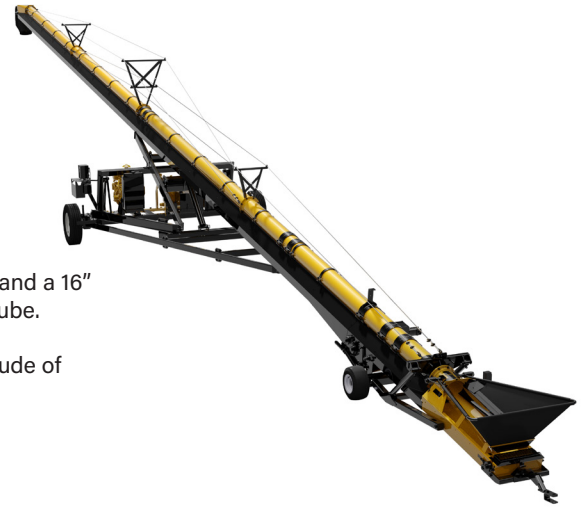

### APPLICATIONS

- Load and unload Bins / Silos
- Load Trucks and Trailers

Model	Under-Carriage	Tube Dia.	Belt Width	Axle Width	Transport Height	Transport Length	Elec HP	Petrol HP	Diesel HP	Hyd	PTO	Top End Drive	Discharge Height 25°	Discharge Height 30°
1635	A-Frame	10"	16"	8'	10'11" (3.32m)	43'8" (12.4m)	7.5	27	×	✓	✓	✓	15'1" (4.6m)	18'4" (5.51m)
1645	A-Frame	10"	16"	9'1"	11'8" (3.56m)	50'10" (15.49m)	10	27	×	✓	✓	✓	18'11" (5.77m)	22'9" (6.93m)
1645SP	A-Frame	10"	16"	9'1"	11'8" (3.56m)	50'10" (15.49m)	×	38EFI	×	×	×	×	18'11" (5.77m)	22'9" (6.93m)
1655	Scissor Lift	10"	16"	11'4"	12'6" (3.81m)	60'8" (18.49m)	15	×	50	×	✓	×	23'2" (7.06m)	27'9" (8.46m)
1665	Scissor Lift	10"	16"	11'4"	11'10" (3.6m)	65' (19.81m)	20	×	50	×	✓	×	26' (7.92m)	31'5" (9.58m)
1665SP2	Scissor Lift	10"	16"	11'4"	11'10" (3.6m)	65' (19.81m)	×	38EFI	×	×	×	×	26' (7.92m)	31'5" (9.58m)
1670	Scissor Lift	10"	16"	11'4"	11'10" (3.6m)	75'11" (23.14m)	20	×	50	×	✓	×	29'6" (8.99m)	35'3" (10.74m)
1675	Scissor Lift	10"	16"	11'4"	12'5" (6.53m)	80'11" (24.66m)	20	×	50	×	✓	×	31'7" (9.62m)	37'9" (11.5m)
1675SP2	Scissor Lift	10"	16"	11'4"	12'5" (6.53m)	80'11" (24.66m)	×	38EFI	×	×	×	×	31'7" (9.62m)	37'9" (11.5m)
1685	Scissor Lift	10"	16"	12'6"	11'7" (3.53m)	91'1" (27.76m)	20	×	50	×	✓	×	35'10" (10.92m)	42'9" (13.03m)
1685SP2	Scissor Lift	10"	16"	12'6"	11'7" (3.53m)	91'1" (27.76m)	×	38EFI	×	×	✓	×	35'10" (10.92m)	42'9" (13.03m)
1690	Scissor Lift	10"	16"	12'6"	12'2" (3.71m)	96' (29.26m)	20	×	50	×	✓	×	37'11" (11.55 m)	45'3" (13.79m)
16100	Scissor Lift	10"	16"	13'6"	14'7" (4.45m)	105'10" (32.03m)	20	×	50	×	✓	×	42'2" (12.85m)	50'3" (15.32m)

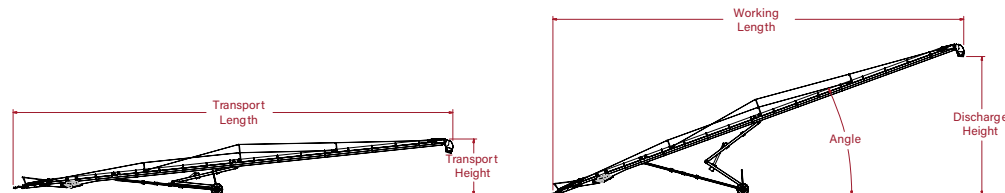

### FEATURES

- Up to 200 tonnes per hour
- Positive, non-slip self-tensioning drive system
- Heavy duty under-carriage
- Adjustable discharge spout
- Collapsible hopper
- A-frame or scissor lift under-carriage
- Full length wind guards
- Lift jack
- Spring tension standard S-Drive box