

SELF-PROPELLED TRANSLOADING CONVEYORS

If you need a dependable, long-lasting grain and fertiliser conveyor with industry-best warranty and over 30 years of innovation experience, you need a Convey-All Transloading Conveyor!


With a 16" or 22" wide rubber crescent top belt, these conveyors have a high capacity ranging from 176 - 327 Tonnes / Hour. The need for belts or pulleys is eliminated through a completely self-contained and fully hydraulic drive and the products low profile allows the collapsible hopper to easily slip under any silo.



APPLICATIONS

- Load Trucks & Trailers
- Load Air Seeder Tanks
- Load & unload Bins / Silos

Model	Under-Carriage	Tube Dia.	Belt Width	Axle Width	Transport Height	Transport Length	Petrol HP	Diesel HP	Top End Drive	Discharge Height 25°	Discharge Height 30°
1635 TL	A-Frame	10"	16"	8'4"	9'7" (2.92m)	43'9" (13.33m)	35	Enquire	✗	14' (4.26m)	17'4" (5.28m)
1650 TL	A-Frame	10"	16"	8'4"	11'5" (3.47m)	53'7" (16.33m)	35	Enquire	✓	18'8" (5.68m)	22'10" (6.95m)
1658 TL	A-Frame	10"	16"	8'4"	12'10" (3.91m)	60'8" (18.49m)	35	Enquire	✓	21'10" (6.65m)	26'7" (8.10m)
2245 TL	Scissor Lift	14"	22"	8' 4"	13' 6" (4.11m)	51' 6" (15.69m)	✗	50	✗	16'3" (4.95m)	19'9" (6.01m)
22525 TL	Scissor Lift	14"	22"	8'4"	15'4" (4.67m)	58'10" (17.93m)	✗	50	✗	20'7" (6.27m)	24'6" (7.46m)

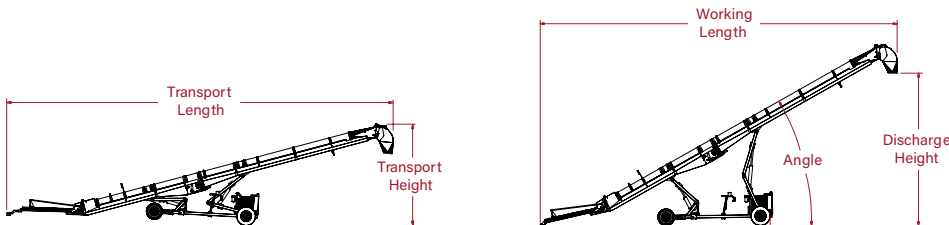

FEATURES

1600 TL SERIES

- 35 HP twin petrol engine
- "A" frame undercarriage with hydraulic cylinder lift
- 45 litre fuel tank
- Tandem hydraulic system
- Winch down collapsible hopper
- Steel hydraulic oil tank 100l
- All operations at ground level
- Up to 200 tonnes per hour

2200 TL SERIES

- 22" - 2 ply rubber crescent top belt
- 50 HP Kubota diesel engine
- 14" diameter x 12 gauge tubes
- Hydraulic belt drive with 4000 series motor
- Positive pinch belt drive
- Hydraulic driven mover with 180 deg steering
- 190 litre hydraulic oil tank
- Up to 300 tonnes per hour