


BTS-290 Seed Tender



You can fill most planters with only one set-up. Conveyor can be transported to the front or rear.


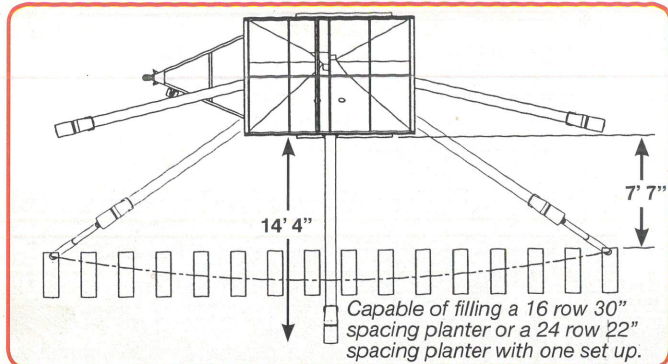


With 152° of swing you get more reach for fewer moves. Use with virtually any planter including center fill models.



Available with:

- **New** Wireless remote control gives you remote starting, throttle control, power swing and gate(s) control.
- Dedicated bumper hitch and gooseneck trailers (as shown). Deck height of dedicated 290 trailers are 23".
- Hydraulic drive rather than electric start gas engine.
- Sample access ports.
- A divided hopper - equal split (as shown on left). Limited availability of 3 compartment hoppers. Please order early.
- Onboard scale.

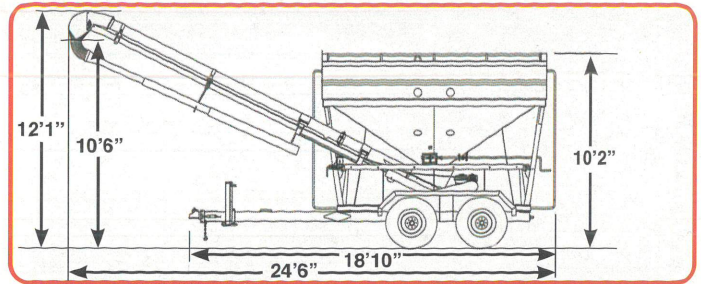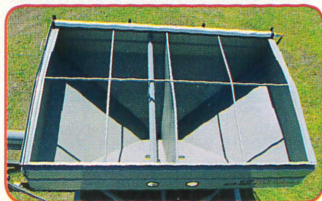

With a hopper height of 10' the BTS290 easily fits under most bulk seed loading stations. Easily reached with most front end loaders and forklifts. Ideal for farmers who use tote bags or seed boxes.



CONVEY-ALL BTS290 Seed Tender

- **Fast and effortless - no more handling bags.**
- **Conveyor load-out, use with any seed.**
- **290 units (240 bu.) - the ideal size for most large planters.**

If you've been told a brush auger or air delivery system doesn't damage delicate seeds, ask your seed cleaning plant why they won't use them on the clean side of their plant!

All Convey-All BTS Seed Tenders feature conveyor load-out. The conveyor ensures gentle handling so there's no seed damage - even with delicate, extra dry seed. The conveyor is faster than a brush type auger and it can also be used for granular herbicides and fertilizer.

The new BTS 290 is built for productivity. You don't have to back up to fill most planters. Simply pull along side the rear of the planter, swing the conveyor into position and you are ready to fill.

The swinging conveyor feature is standard. It is designed to save you time by giving you more reach. Even with the larger planters you shouldn't have to move the tender. The conveyor effortlessly swings from transport to working position. Set-up is fast and easy.

Specifications: BTS290 Seed Tender

Conveyor	8" dia. x 21' tube with 10" wide belt
Discharge Rate	1,500 lbs./min.
Hopper Capacity	290 units (240 bu.) single or equal split hopper
Conveyor Swing	Conveyor transports to front or rear and has a 152° swing
Mounting	Deck mount frame. Also available with 23" high dedicated gooseneck or bumper hitch trailer
Length	24'6" (tank plus conveyor in transport position)
Hopper Length	11' 6"
Hopper Width*	8'
Hopper Height*	8' 3"
Conveyor Height*	10' 4"
Discharge Height*	8' 8 3/4"
Weight*	2560 lbs. with gas drive & split hopper

*For total discharge height, transport dimensions and weight add the dimensions and weight of the trailer or truck deck.